



SINOCERA



Global Sensor
Technology

Piezoelectric Accelerometer (Isolated, Industrial)

Model: CA-YD-188T

Features


- Built-in IEPE, low noise, strong resistance of disturbance.
- Isolated, Floating, industrial site monitoring.
- 2-pin MIL-C-5015 two-pin socket output.




Main Specifications

Sensitivity (20±5°C)	500 mV/g
Measurement Range (pk)	±10 g
Max Transverse Sensitivity	<5%
Frequency Response (±10%)	0.6~5,000 Hz
(±3dB)	0.1~10,000 Hz
Amplitude linearity	≤1%
Operating Temp. Range	-40~+120 °C
Temperature Response	See Graph
Shock Limit (pk)	2000 g
Noise (rms)	<80 µV
Output Impedance	<100 Ω
Operating Voltage (Constant current source)	18~28 VDC
Operating Current	2~10 mA
DC Bias Voltage	12±2 VDC
Case Isolation	≥10 ⁸ Ω
Mounting	1/4-28
Sensing Element	Piezoelectric Ceramics
Sensing Geometry	Shear
Case Material	304 Stainless steel
Sealing	IP65
Weight	~90 g
Output	Top 5/8-24 2-pin Socket
Accessories	
Certificate	Calibration parameters
1/4-28 Stud	one
3106A (5015) Plug, Cable (RVVP)	one (3m), one end free

Dimensions

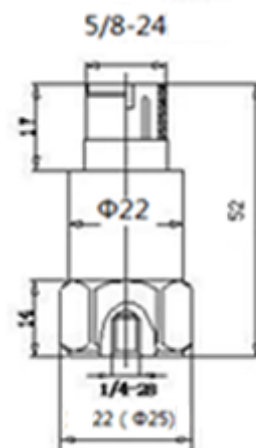

Temperature Response

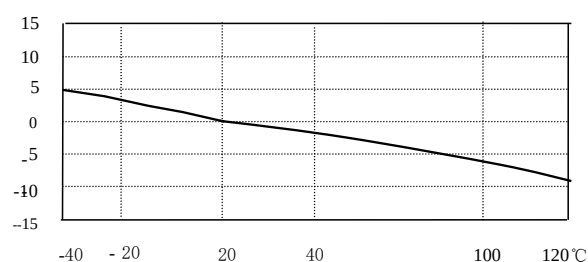

Frequency Response

